


iESS-cab 372k LC

Product Features & Layout



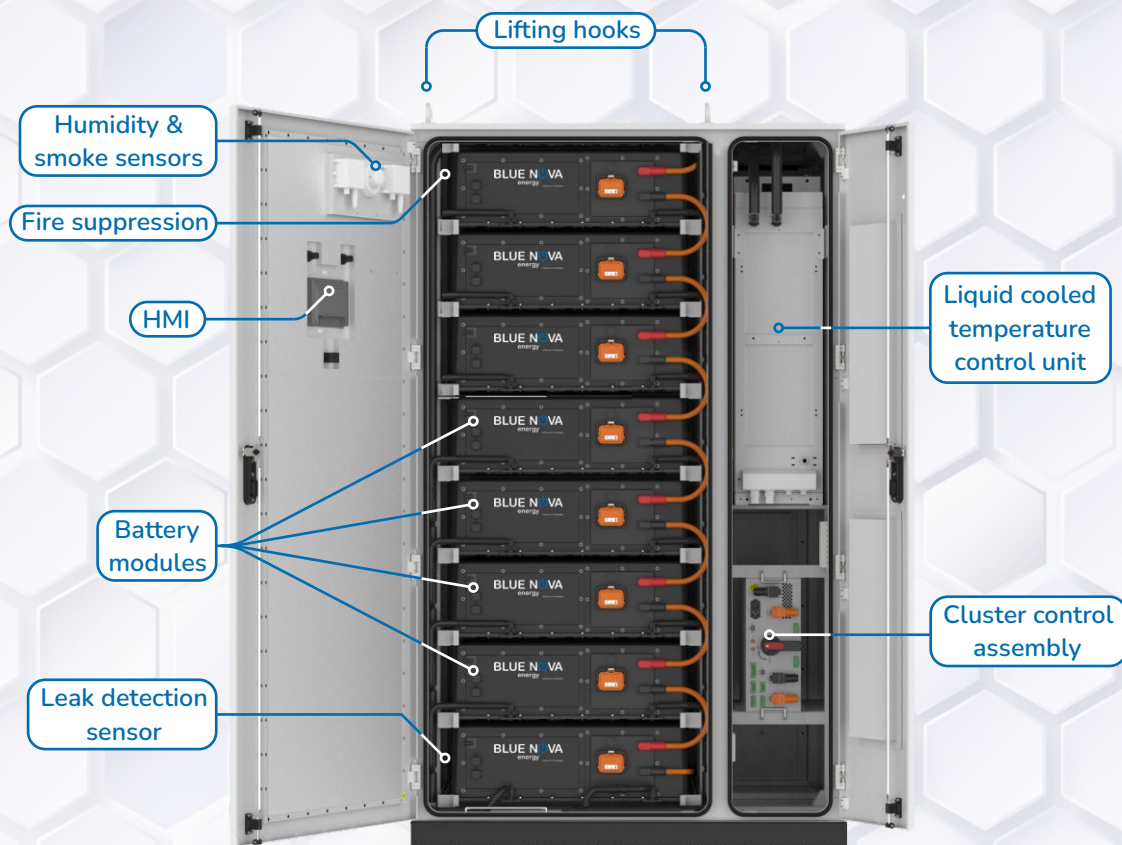

Rated voltage	1331V
Voltage range	1248 ~ 1456V
Rated capacity	280Ah
Rated energy	372.7kWh
Charge / discharge rate	0.5C / 1C
Ingress protection rating	IP55
Operating temperature	-30 ~ 55°C
Storage temperature	-30 ~ 60°C
Altitude	≤ 3000m
Relative humidity	5~ 95% (non-condensing)
Cooling method	Liquid cooling
Fire suppression system	Aerosol
Serial communication	MODBUS TCP/IP
Dimensions (W x D x H)	1350 x 1300 x 2050mm
Weight (net)	3.5t

iESS-cab 372k LC

Technical Specifications

[illegible]