


### iESS-cab 326k LC

## Product Features & Layout



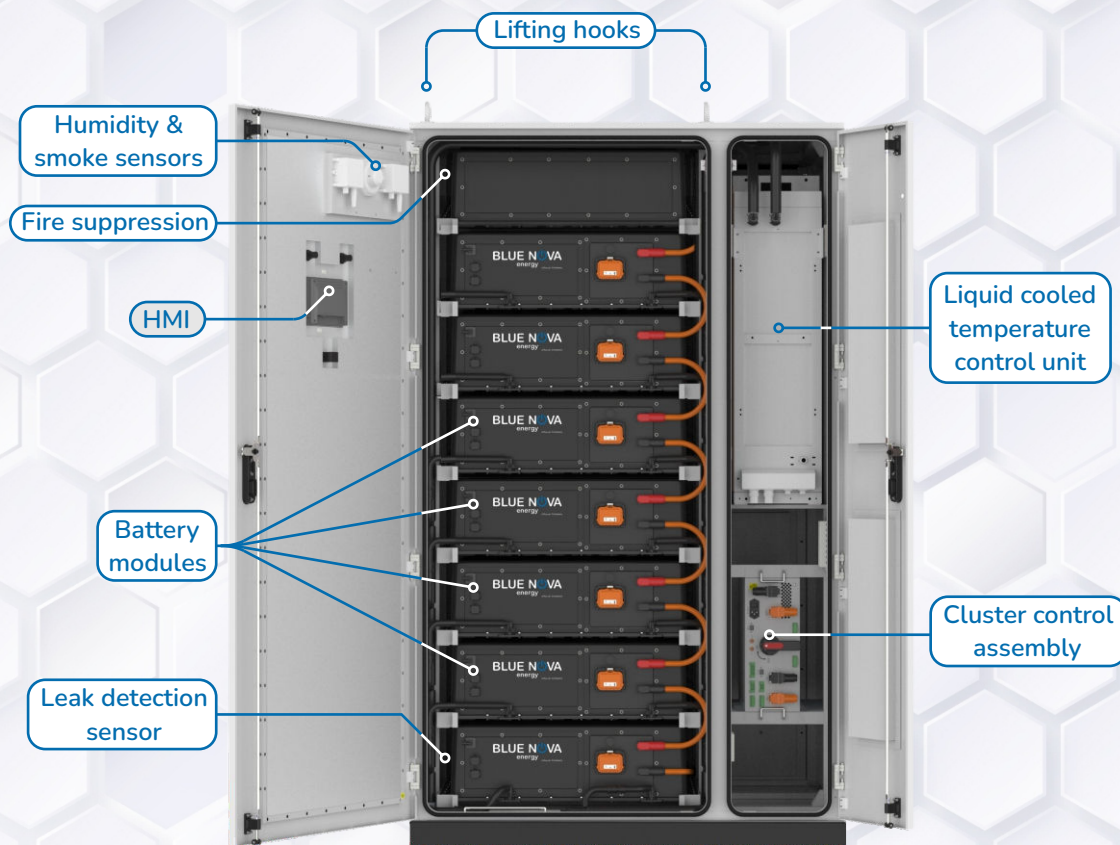

|                           |                         |
|---------------------------|-------------------------|
| Rated voltage             | 1165V                   |
| Voltage range             | 1092 ~ 1274V            |
| Rated capacity            | 280Ah                   |
| Rated energy              | 326.1kWh                |
| Charge / discharge rate   | 0.5C / 1C               |
| Ingress protection rating | IP55                    |
| Operating temperature     | -30 ~ 55°C              |
| Storage temperature       | -30 ~ 60°C              |
| Altitude                  | ≤ 3000m                 |
| Relative humidity         | 5~ 95% (non-condensing) |
| Cooling method            | Liquid cooling          |
| Fire suppression system   | Aerosol                 |
| Serial communication      | MODBUS TCP/IP           |
| Dimensions (W x D x H)    | 1350 x 1300 x 2050mm    |
| Weight (net)              | 3.2t                    |

# iESS-cab 326k LC

## Technical Specifications

[illegible]