

Lithium Iron Phosphate (LiFePO₄) Battery

LFELi-1209M (12.8V9.0Ah)

Features Of LiFePO₄ Battery

Longer Cycle Life: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.

Lighter Weight: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.



Higher Power: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20 C~60 C.

Superior Safety: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.



Physical Dimension-mm



Typical Applications

- Wheelchairs and scooters
- Solar/wind energy storage
- Back-up power for small UPS
- Golf trolleys & buggies
- Electric bikes
- Tools


SPECIFICATION

Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	9.0Ah
	Energy	115.2Wh
	Internal Resistance(AC)	≤60mΩ
	Cycle Life	>2000 cycles @1C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode	0.2C to 14.6V, then 14.6V,charge current to
	Charge Current	4.5A
	Max. Charge Current	9.0A
	Charge Cut-off Voltage	14.6V±0.2V
Standard Discharge	Rated Discharge Current	4.5A
	Max. Discharge Current	9.0A
	Discharge Cut-off Voltage	10.0V
Environmental	Charge Temperature	0℃ to 55℃ (32F to 131F) @60±25% Relative Humidity
	Discharge Temperature	-20℃ to 60℃ (-4F to 140F) @60±25% Relative Humidity
	Storage Temperature	-20℃ to 40℃ (-4F to 113F) @60±25% Relative Humidity
	IP Class	IP65
Mechanical	Plastic Case	ABS
	Approx. Dimensions	151mm*65mm*99mm (5.95in.*2.56in.*3.90in.)
	Approx. Weight	1.0kg (2.20lbs)
	Terminal	T2


Lithium Iron Phosphate (LiFePO₄) Battery

LFELi-1209M (12.8V9.0Ah)


Different Rate Discharge Curve (25°C)

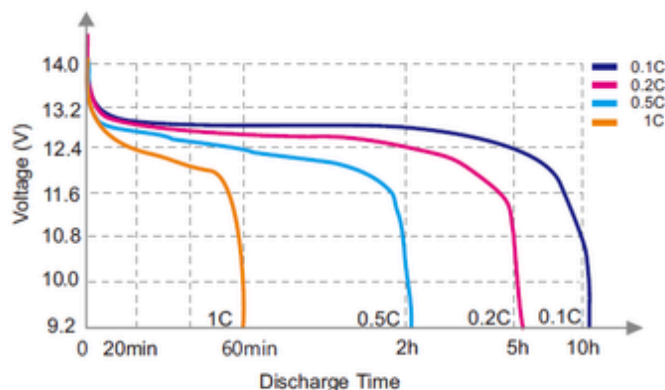


Different Temperature Discharge Curve (0.5C)

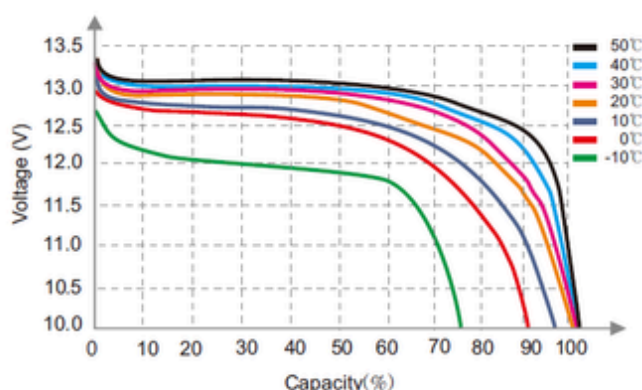


State of Charge Curve(0.5, 25°C)

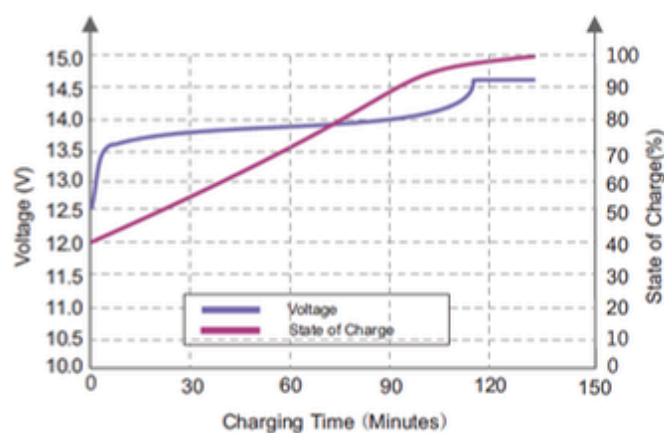

Charging Characteristics (0.5C, 25°C)

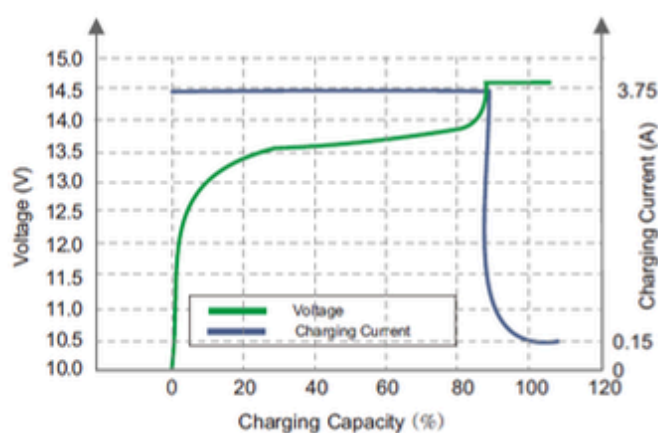

Different DOD Discharge Cycle Life Curve (1C)

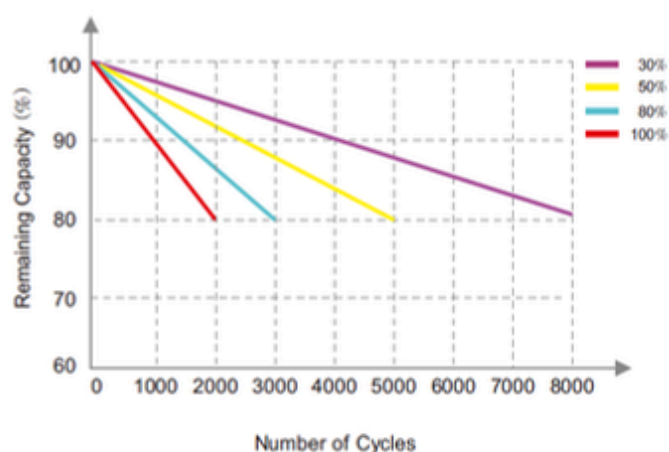

Different Temperature Self Discharge Curve

