

Suitable for



Turbo



Hybrid



Start-Stop System

8.0L

8000cc Petrol

7.0L

7000cc Diesel

JumpsPower™ **GT2**
empowered by ArnosMater



Australian Owned
& Operated

Up to **30X**
Jump Starts Per Charge**

PD 30W
3X Faster

USB-C
Input & Output

QC 18W
USB-A

96W
DC12V



Ingenious
Spark-proof
Clamps



Jump Starter + **Power Bank**
12V | 2000A LED Flashlight **37000mWh**

Features

More Advanced Portable Jump Starter

With the newly invented "The 4th Generation" battery system, it has much more power to jump-start a dead battery of a petrol or diesel engine, such as those found in cars, motorcycles, boats, jet skis, ATVs, and lawn mowers, in just seconds. It can jump-start an automobile battery multiple times on a single charge. It is especially designed for jump-starting the latest vehicles with EV, Turbo, Hybrid, and Start-Stop Systems.

USB-C with Power Delivery (PD) Fast Charging

Delivering up to 30W of high-voltage charging power, this device is ideal for charging a wide range of USB-C PD devices quickly. It intelligently adjusts the power output to provide fast and efficient charging for each connected device. Whether you're on the go and need to recharge a USB-C MacBook or fast-charge a compatible iPhone from 0-50% in just 30 minutes*, this power bank has you covered. (*USB-C to Lightning Cable/USB-C to USB-C Cable not included.)


The bi-directional USB-C port facilitates faster recharging, allowing you to do more. With a USB-C PD charger**, it takes only about 3 hours to fully recharge the power bank through the input port. (**USB-C PD charger not included.)

12V DC Output Port

With the 12V cigarette lighter adapter provided, you can power any 12V electric devices like a Vacuum cleaner, Air compressor, Tyre inflator, Waxer and Polisher etc.

LED Light

LED flashlight with different lighting patterns.

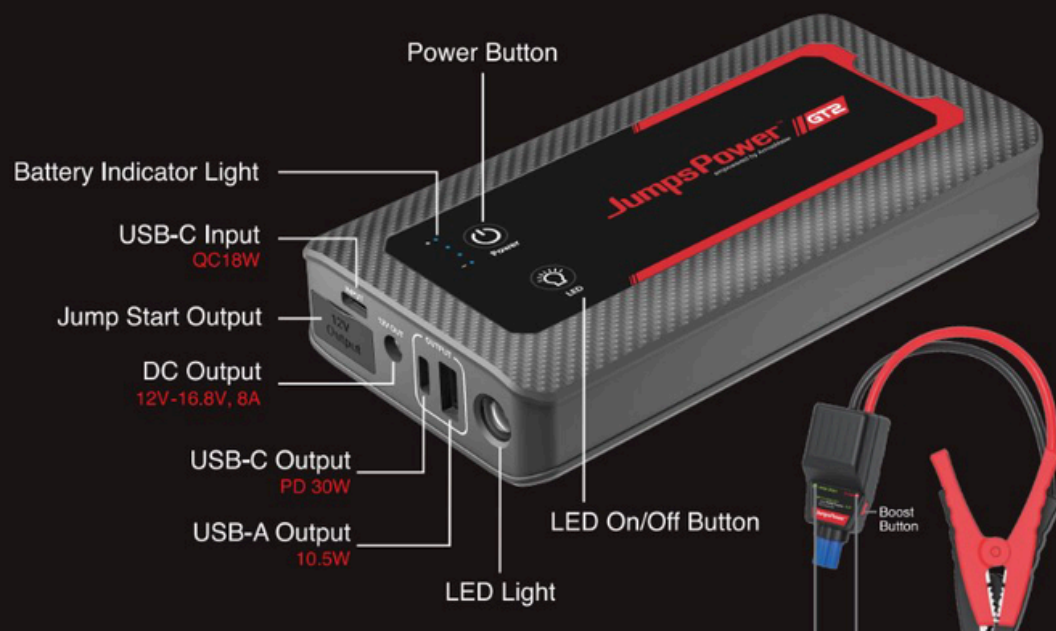

Protection Functions On

AI Smart Reset Mechanism
 Improper Insertion Prevention
 Low Power Consumption
 Over Charge
 Over Cranking
 Over Current
 Over Discharge
 Over Voltage
 Overheat
 Peak Current Surge
 Reverse Charge
 Reverse Polarity
 Short Circuit
 Spark Proof

Product Specifications

Battery Capacity: 37000mWh / 37Wh / 10000mAh

Battery Type: Lithium-ion

Battery Life Cycle: 1000+

Battery Standby Time: Up to 9-12 months

Peak Amps: 12V=2000A*

Clamp Power: 12V=1000A

USB-C Input: QC 18W Max. (5V=3A, 9V=2A, 12V=1.5A)

USB-C Output: PD 30W Max (5V=3A, 9V=2A, 12V=2.5A)

USB-A Output: 10.5W Max. (5V=2.1A)

DC Output: 96W Max. (12V-16.8V, 8A Max.)

Operating Temperature: -20°C to 60°C

Dimensions: 160 x 84 x 29mm

Weight: 460g

* Theoretical Short Circuit Current

** Performance can vary depending on jump starter's battery level, operating temperature and battery terminals surface condition.

For 12V Vehicles

Recommended Vehicle Engine Displacements for Jump Starting:

For Engines Up To 8.0L Petrol and 7.0L Diesel

In the box:

GT2

Jumper Cable

USB-A to USB-C Cable

12V Cigarette Lighter Adapter

User Manual

Carry Bag



Global liability insurance

Products covered: 3 Million USD Global Product Liability Insurance

Safety assurance

This product fully complies with Australian Standards, CE Standards, and uses batteries that are certified by UL.



Can I take this item on a flight?

Yes, you can! This product meets the requirements of IATA and can be carried on a flight.

How many times can I use JumpsPower to jump start a car?

Up to 30 jump starts per charge.

Up to **30X**
Jump Starts Per Charge**



Designed in Australia

Patented Product

Made in China

JumpsPower is a trademark of ArnosMaterTM. All rights reserved.
 iPhone is a trademark of Apple Inc., registered in the U.S. and other countries.
 Macbook is a trademark of Apple Inc., registered in the U.S. and other countries.