

35L

NL35 LEGACY SMART QC

45L

NL45 LEGACY SMART QC

40L

NL40 LEGACY SMART QC

52L

NL52 LEGACY SMART QC

55L

NL55 LEGACY SMART QC

65L

NL65 LEGACY SMART QC

80L

NL80 LEGACY SMART QC

125L


NL125 LEGACY SMART QC

SINGLE COMPARTMENT, SINGLE DOOR


UNIVERSAL LID
LOW PROFILE

The smallest fridge in our large range of fridges & freezers comes fully packed with the latest innovation, making this a must have for every small family and weekend campers. Because of its small size this fridge/freezer can easily fit into most sedan vehicles.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	3	SINGLE	37mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
37.7L	20.85Kg	670mm(W) 392mm(D) 430mm(H)	9.5 - 31.5Vdc 100 - 240Vac




FRI-30353


UNIVERSAL LID
LOW PROFILE

Like the NL35 Low Profile, the new NL45 Low Profile is small in size but big in features, boasting with the same compact footprint but with a higher volume.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	3	SINGLE	37mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
45.3L	21.65Kg	670mm(W) 392mm(D) 460mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30453




UNIVERSAL LID




Small outside, but big inside, National Luna's fully-featured 'small' fridge/freezer fits easily into most vehicles offering a convenient way to take a weekends' food and drinks for two or three people. Ideal as a dedicated freezer.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	3	SINGLE	60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
39.3L	22.5Kg	635mm(W) 420mm(D) 515mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30403




UNIVERSAL LID




National Luna's most affordable fridge/freezer gives you all the benefits of metal construction, large cooling surface, intelligent compressor control and low power draw. Ideal large capacity fridge in a compact size.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	3	SINGLE	40mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
52.6L	24.4Kg	710mm(W) 385mm(D) 506mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30523




UNIVERSAL LID




National Luna's NL55 fridge/freezer gives you all the benefits of metal construction, large cooling surface, intelligent compressor control and low power draw with 60mm insulation.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	3	SINGLE	60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
53.5L	25.4Kg	750mm(W) 425mm(D) 535mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30553




UNIVERSAL LID




The same small footprint as National Luna's NL40 fridge but with over 50% more capacity. More suited for use as a fridge/freezer in motor homes and other applications where height is not an issue.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	5	SINGLE	60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
66L	28.2Kg	635mm(W) 420mm(D) 715mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30653




UNIVERSAL LID




Practically-sized for families and tour operators, and big enough to carry sufficient provisions for long expeditions, National Luna's NL80 fridges offer powerful cooling performance in a robust and easy to manage package.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	5	SINGLE	60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
79.4L	31.2Kg	835mm(W) 495mm(D) 525mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30803




UNIVERSAL LID





A refrigerator that gives commercial users and tour operators serious carrying capacity with a relatively small footprint and remarkably low power draw!

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
20°C to -30°C (68°F to -22°F)	8	SINGLE	60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
128.1L	37.8Kg	835mm(W) 495mm(D) 735mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-31253

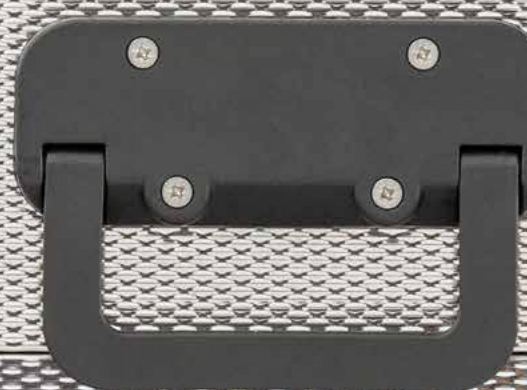PORTABLE
REFRIGERATIONLIMITED
3
YEAR
WARRANTYLEGACY SMART QC Single Compartment Models:
NL35 / 40 / 45 / 52 / 55 / 65 / 80 / 125LEGACY SMART QC Dual Control Models:
NL50 / 60 / 70 / 72 / 90 / 110

National Luna: Extreme performance, quality & strength.....simply the smartest choice in Portable Refrigeration!

National Luna's range of Single and Dual compartment fridges are developed for performance at high ambient temperatures, minimum power consumption and overall operating efficiency. These fridges are recognised as the most powerful in the world. Low power consumption is achieved using 37 - 60mm high-density insulation and a very compact design.

Using the National Luna unique Dual Control technology, the double door range of fridges was developed. Using only one compressor, the user can set the bin temperatures independently. Additionally, the bins can be individually switched off in cases where only one compartment is needed (this saves energy consumption).

For the ultimate in versatility, National Luna offers its unique Dual Control units with two separate individually controlled fridge-freezer compartments, giving you the options of freezer/freezer, fridge/fridge or freezer/fridge – it's your choice!


FEATURES

- NL Connect Bluetooth® App
- Single Compartment with Digital Thermostat
- Dual Compartment Fridge/Freezer with Separate Freezer Lid
- Dual, Independent Temperature Controls
- Low-battery Protection
- Auto-switch between AC and DC Power
- 3 Year Limited Warranty
- Stainless Steel Exterior
- High-density Insulation
- National Luna Approved Off-road Compressor
- Internal LED Light
- Full Set of Baskets


Single	Dual
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓
✓	✓

UNIVERSAL LID CONFIGURATIONS


NL50's & NL52's only

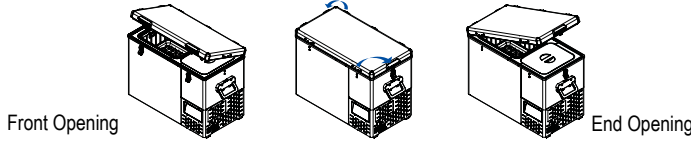

NL35's & NL45's only

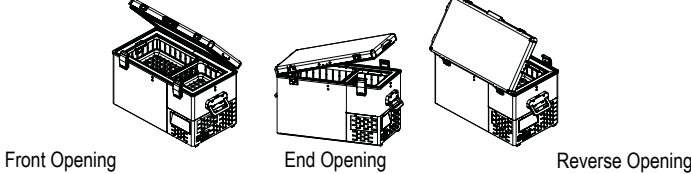

MOVABLE CONTROL PANEL (ALL MODELS)

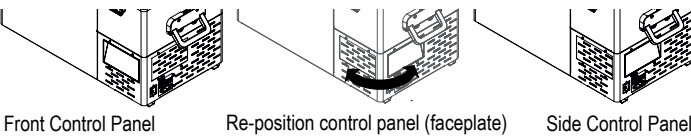

BLUETOOTH®

NL CONNECT is National Luna's mobile application that allows you to interact wirelessly with your National Luna fridges featuring Bluetooth® wireless technology.

With NL Connect you can :

- Monitor live fridge temperatures and status.
- Control temperature set-points.
- Adjust fridge operating modes.
- Get notified of fault conditions.



DUAL FAST-CHARGING USB PORTS



The LEGACY SMART QC series is fitted with Dual Fast-Charging USB ports.

USB Charge (each port)
24W max: 5V, 9V, 12V

ADDITIONAL COMPONENT FEATURES




Built-In Bottle Opener



Tie-Down Points on Handle

RED REMOVABLE HINGE (OPTIONAL)

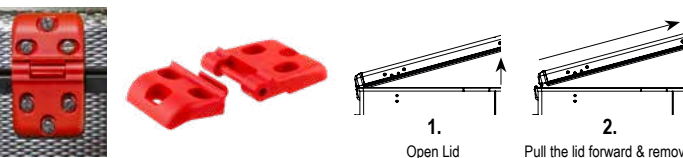

50L

NL50 LEGACY SMART QC


DUAL COMPARTMENT, SINGLE DOOR

UNIVERSAL LID



The ideal fridge/freezer combination for recreational users. Dual thermostats allow settings of dual fridge, dual freezer or a combination of fridge and freezer.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
LEFT: 20°C to -18°C (68°F to 0°F) RIGHT: 20°C to -24°C (68°F to -11°F)	3	DUAL	40mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
LEFT COMPARTMENT 38.3L RIGHT COMPARTMENT 11L	24.8Kg	710mm(W) 385mm(D) 506mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30503

60L

NL60 LEGACY SMART QC


DUAL COMPARTMENT, SINGLE DOOR

UNIVERSAL LID



Dual thermostats allow settings of dual fridge, dual freezer or a combination (where the smaller, more efficient compartment should be used as a freezer).

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
LEFT: 20°C to -24°C (68°F to -11°F) RIGHT: 20°C to -18°C (68°F to 0°F)	5	DUAL	40mm TO 60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
LEFT COMPARTMENT 24.2L RIGHT COMPARTMENT 34.9L	28.2Kg	750mm(W) 425mm(D) 535mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30603

70L

NL70 LEGACY SMART QC


DUAL COMPARTMENT, SINGLE DOOR

LOW PROFILE



This fridge is specifically designed to fit into applications where height is restricted. Similar to other models, the dual thermostats allow settings of dual fridge, dual freezer or a combination (the smaller, more efficient compartment should be the freezer).

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
LEFT: 20°C to -24°C (68°F to -11°F) RIGHT: 20°C to -18°C (68°F to 0°F)	5	DUAL	40mm TO 60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
LEFT COMPARTMENT 36L RIGHT COMPARTMENT 36.7L	31.2Kg	835mm(W) 495mm(D) 475mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30703

90L

NL90 LEGACY SMART QC


DUAL COMPARTMENT, SINGLE DOOR

LOW PROFILE



The NL90 is designed to offer a larger freezer and fridge capacity compared to the NL60. Dual thermostats allow settings of dual fridge, dual freezer or a combination (the smaller, more efficient compartment should be the freezer).

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
LEFT: 20°C to -24°C (68°F to -11°F) RIGHT: 20°C to -18°C (68°F to 0°F)	5	DUAL	40mm TO 60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
LEFT COMPARTMENT 39.1L RIGHT COMPARTMENT 46.2L	33.6Kg	835mm(W) 495mm(D) 525mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30903

72L

NL72 LEGACY SMART QC


DUAL COMPARTMENT, DOUBLE DOOR

LOW PROFILE



The ultimate in versatility: The Double Door design allows you to select individual compartment temperatures to suit your needs. Set as a combination of fridge & freezer, as twin fridges or twin freezers at different temperatures.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
LEFT: 20°C to -24°C (68°F to -11°F) RIGHT: 20°C to -24°C (68°F to -11°F)	5	DUAL	60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
LEFT COMPARTMENT 38.2L RIGHT COMPARTMENT 33L	33.5Kg	835mm(W) 495mm(D) 525mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-30723

110L

NL110 LEGACY SMART QC


DUAL COMPARTMENT, DOUBLE DOOR

LOW PROFILE



The Double Door design with a large capacity allows you to select individual compartment temperatures to suit your needs. Set as a combination of fridge & freezer, as twin fridges or twin freezers at different temperatures.

TEMPERATURE RANGE SETTING	BASKETS	CONTROL	INSULATION
LEFT: 20°C to -24°C (68°F to -11°F) RIGHT: 20°C to -24°C (68°F to -11°F)	8	DUAL	60mm
VOLUME	WEIGHT	DIMENSIONS	INPUT POWER
LEFT COMPARTMENT 54.6L RIGHT COMPARTMENT 53.5L	39.4Kg	835mm(W) 495mm(D) 706mm(H)	9.5 - 31.5Vdc 100 - 240Vac



FRI-31103



Welcome to the World of National Luna Portable Refrigeration

National Luna's refrigeration product range has evolved over 35 years. Developed for performance at high ambient temperatures, minimum power consumption and overall operating efficiency, these fridges are recognised as the most powerful in the world.

The LEGACY SMART QC series inherits the rugged design and superior cooling performance of the LEGACY series and now also offers the ability to monitor and control the fridge operations wirelessly using the new NL CONNECT mobile application.

Low power consumption is achieved using a combination of 42mm and 60mm high-density insulation to achieve a very compact design.

SINGLE COMPARTMENT

These fridges have been designed to be used either as a fridge or a freezer.

TWIN COMPARTMENT

These fridges have been designed to offer a larger fridge capacity by reducing the insulation on one of the compartments (usually used as the fridge). Using only one compressor, the user can set the compartment temperatures independently as well as switching off individual compartments.

DOUBLE DOOR - EFFECTIVELY 2 X FRIDGES IN ONE!

Using the National Luna unique Dual Control Technology, the Double Door range of fridges was developed (60mm insulation) for maximum efficiency and space-saving.

National Luna fridges cool faster, stay colder for longer, and draw much less power.

Due to ongoing product development and design, some catalogue images may differ from the actual product. National Luna reserves the right to change any information contained in this document without prior notice.

National Luna will not be held responsible for errors or omissions in this document.

www.nationalluna.com

Issue 7 - September 2023

BLI-33001